



ZEPRO Z3NNU 75-100

Loading diagram

(160 bar)		12 volt	24 volt
Pump – Motor Unit		115 A	75 A
Magnet (hydraulic unit)		1,4 A	0,7 A
Magnet (electric safety valve)		1,5 A	0,75 A
Solenoid		1,8 A	0,9 A
Cable area	Control cable	1,5 mm ²	1,5 mm ²
	Main cable 0-8 m	25 mm ²	25 mm ²
	Main cable 8-15 m	35 mm ²	35 mm ²
	Main cable >15 m	–	–
Power source	Min. capacity	180 Ah	170 Ah
	Min. voltage	9 volt	18 volt

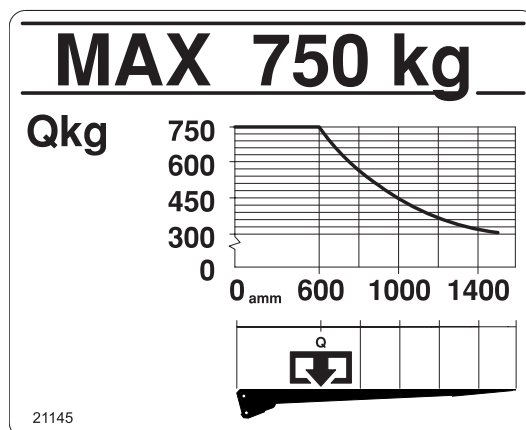

Installation dimensions (mm)

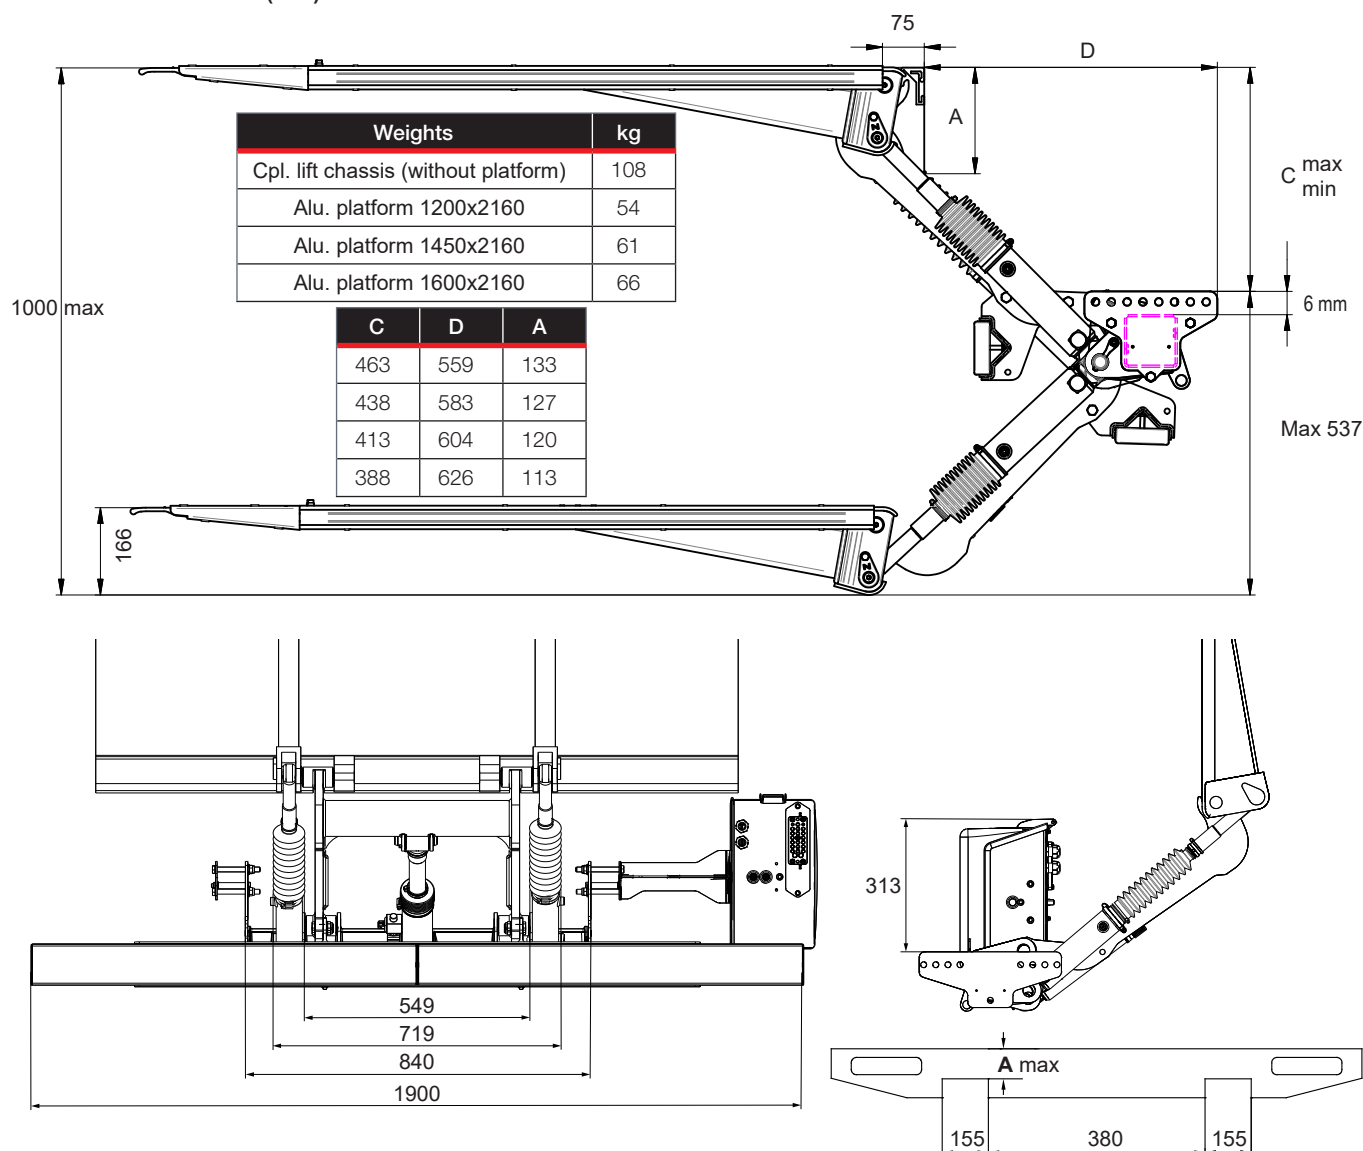

Z-Lyften Sales

Tel.: +46 (0)10 459 05 00

E-mail: zepro@zepro.com | zepro.se

2019-11-19