



ZEPRO Z 75-110

Belastningsdiagram




(150 bar)		12 volt	24 volt
Pump - Motor enhet		115 A	75 A
Magnet (hyd. aggregat)		1,4 A	0,7 A
Magnet (el. slangbr. ventil)		1,5 A	0,75 A
Solenoid		1,8 A	0,9 A
Ledningsarea:	Manöverkabel	1,5 mm ²	1,5 mm ²
	Matarledning 0-8 m	35 mm ²	35 mm ²
	Matarledning 8-15 m	35 mm ²	35 mm ²
	Matarledning >15 m	–	35 mm ²
Strömkälla:	Min. kapacitet	140 Ah	110 Ah
	Min. spänning	9 volt	18 volt

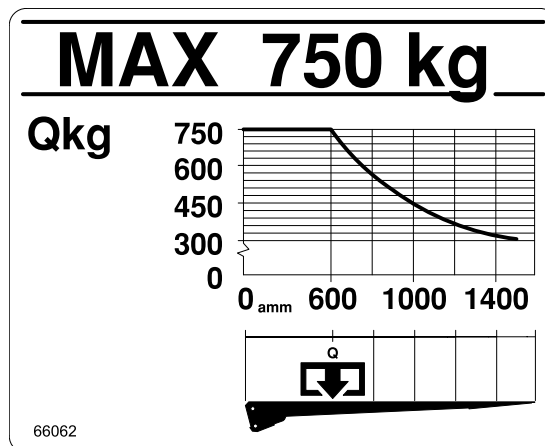

Inbyggnadsmått (mm)

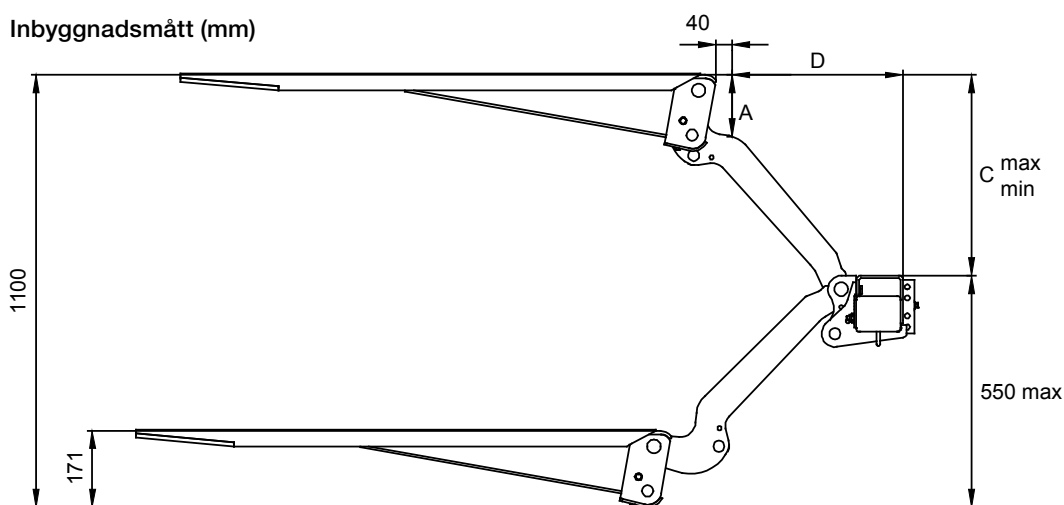

C	A	D
550	146	432
500	133	498
450	125	549
400	117	590
350	105	624
300	95	652
250	85	675

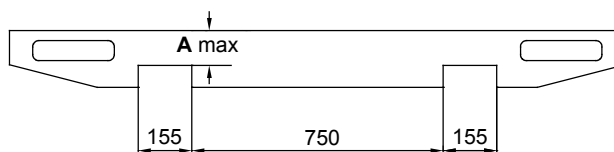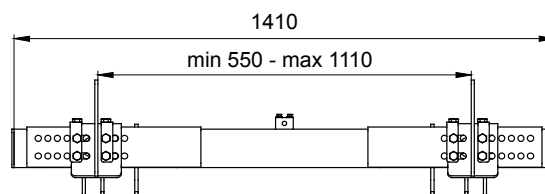

2017-04-25

Z-Lyften Produktion AB

Tel.: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepro@zepro.com | zepro.se