



ZEPRO ZNU 45-90

Belastningsdiagram




(110 bar)		12 volt	24 volt
Pump - Motor enhet		95 A	60 A
Magnet (hyd. aggregat)		1,4 A	0,7 A
Magnet (el. slangbr. ventil)		1,5 A	0,75 A
Solenoid		1,8 A	0,9 A
Ledningsarea:	Manöverkabel	1,5 mm ²	1,5 mm ²
	Matarledning 0-8 m	35 mm ²	35 mm ²
	Matarledning 8-15 m	35 mm ²	35 mm ²
	Matarledning >15 m	–	35 mm ²
Strömkälla:	Min. kapacitet	140 Ah	110 Ah
	Min. spänning	9 volt	18 volt

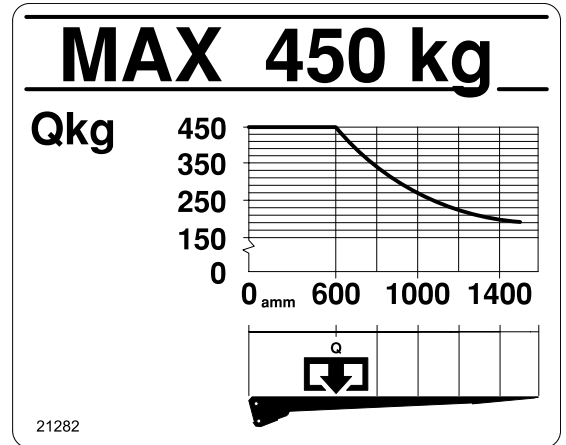

Innbyggnadsmått (mm)

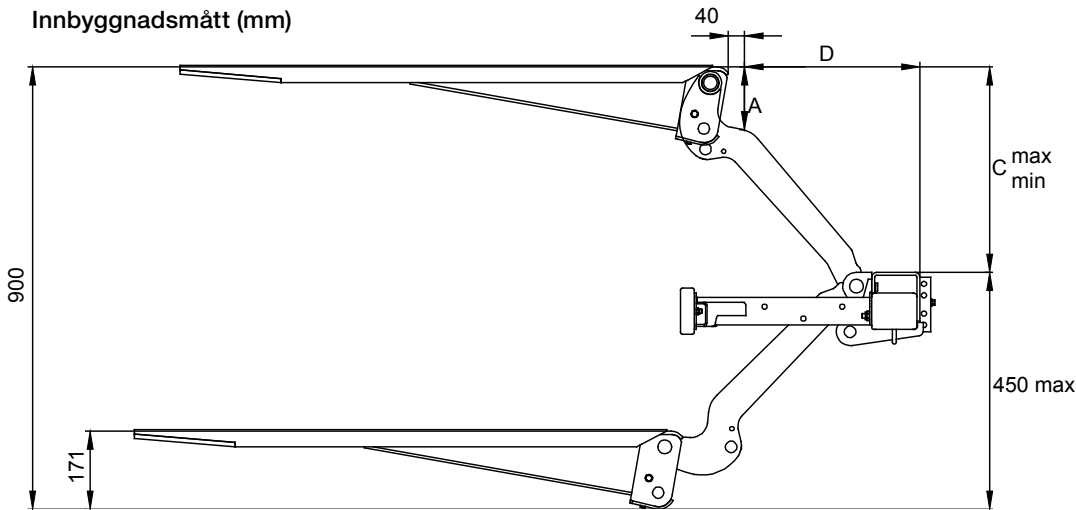

C	A	D
450	136	384
400	126	444
350	115	490
300	104	526
250	96	554

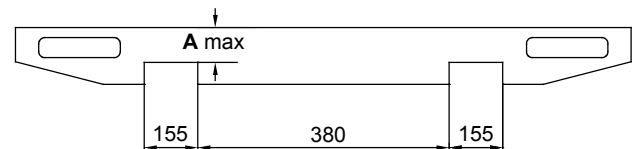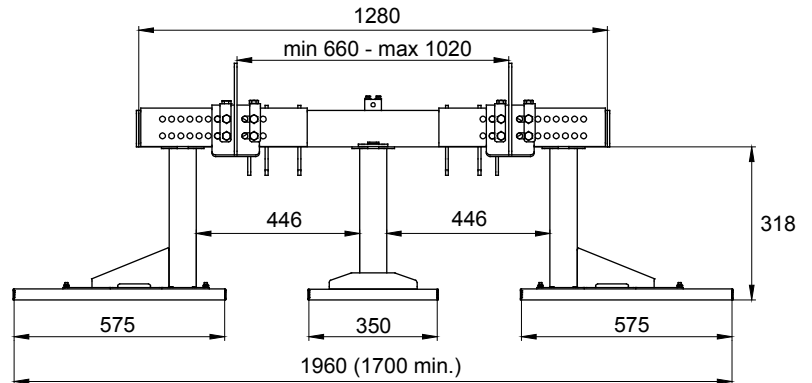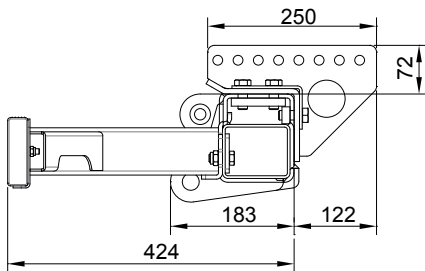

2017-04-25

Z-Lyften Produktion AB

Tel.: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: zepro@zepro.com | zepro.se