
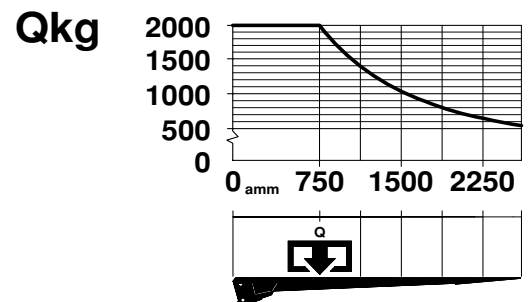


(200 bar)	12 volt	24 volt
Pump - Motor enhet	245 A	135 A
Magnet (hyd. aggregat)	4,2 A	2,1 A
Magnet (el. slangbr. ventil)	1,5 A	0,75 A
Solenoid	1,5 A	0,85 A
Ledningsarea:		
Manöverkabel	1,5 mm ²	1,5 mm ²
Matarledning 0-8m	35 mm ²	35 mm ²
Matarledning 8-15m	50 mm ²	35 mm ²
Matarledning <15m	-	50 mm ²
Strömkälla:		
Min. kapacitet	170 Ah	180 Ah
Min. spänning	9 Volt	18 Volt

Belastningsdiagram

MAX 2000 kg

Inbyggnadsmått (mm)

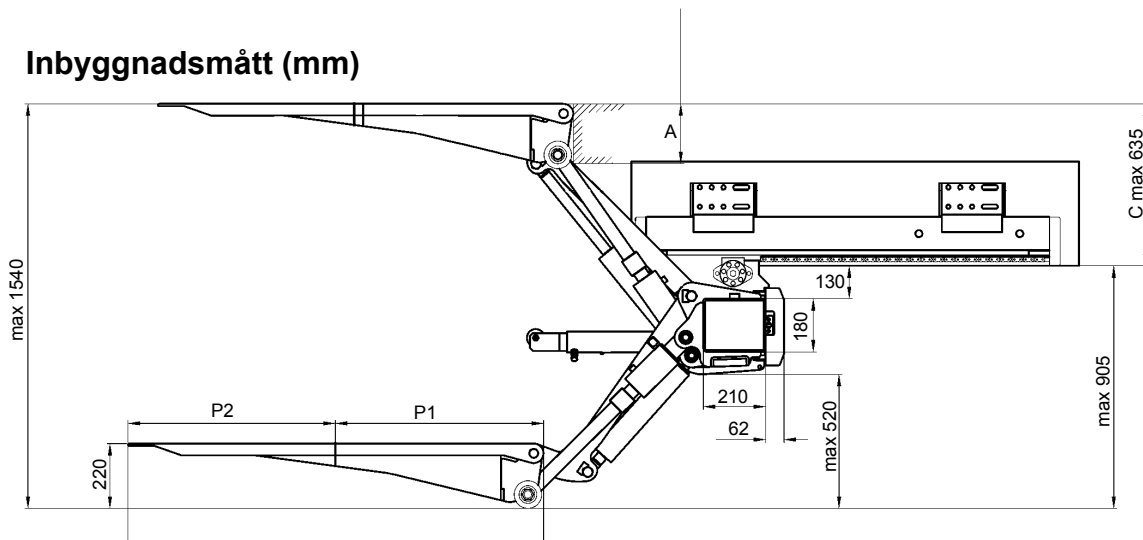

C	A
635	210
600	191
550	177
500	167
450	158
400	147
350	134
285	118

PML

P1	P2	O
754	639	1250

