

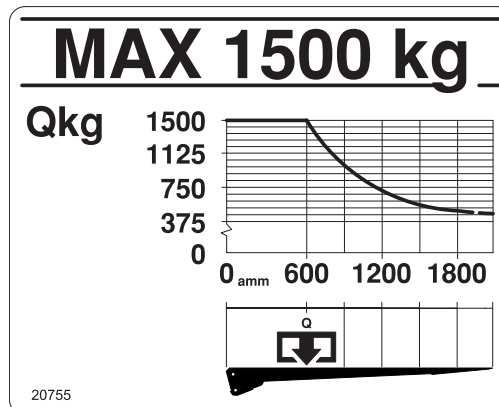
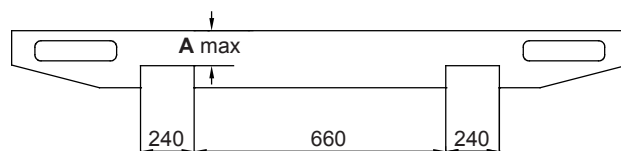
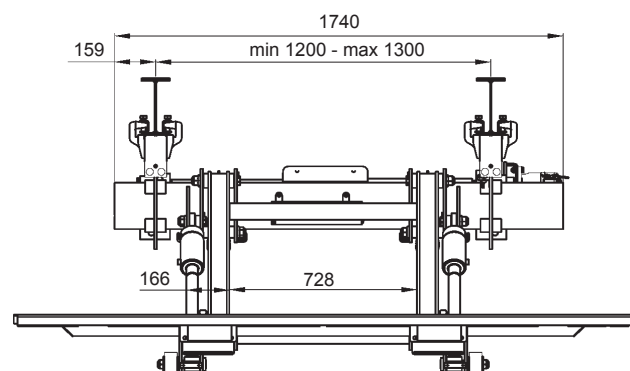


Belastningsdiagram

(130 bar)	12 volt	24 volt
Pump - Motor enhet	185 A	110 A
Magnet (hyd. aggregat)	4,2 A	2,1 A
Magnet (el. slangbr. ventil)	1,5 A	0,75 A
Solenoid	1,8 A	0,9 A
Ledningsarea:		
Manöverkabel	1,5 mm ²	1,5 mm ²
Matarledning 0-8m	35 mm ²	35 mm ²
Matarledning 8-15m	50 mm ²	35 mm ²
Matarledning >15m	-	50 mm ²
Strömkälla:		
Min. kapacitet	180 Ah	170 Ah
Min. spänning	9 Volt	18 Volt

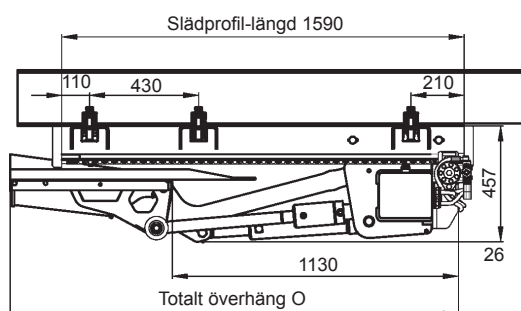

Inbyggnadsmått (mm)

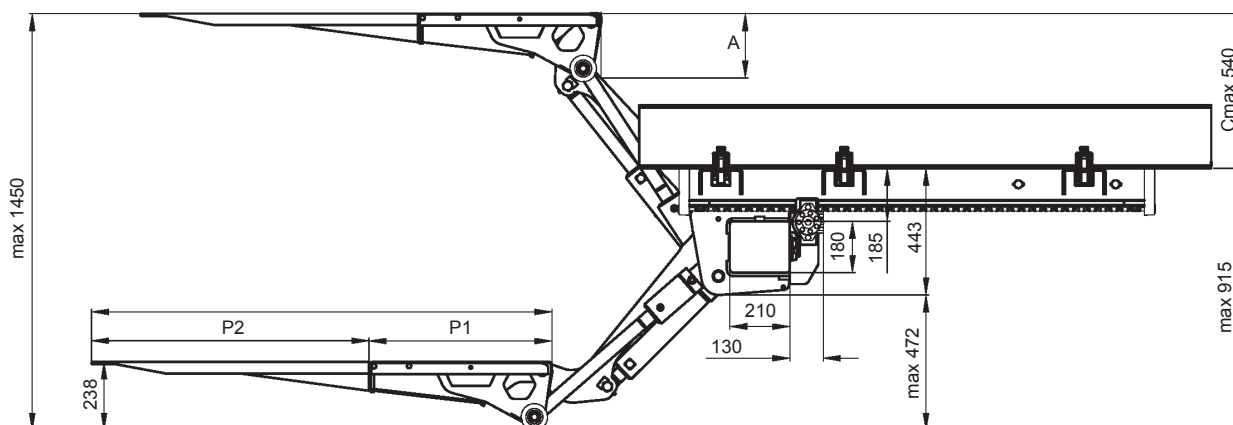

C	A
540	225
500	207
450	191
400	179
350	170
300	163
270	159

PML

P1	P2	O
749	889	1879
824	889	1954

