



6400 (130 bar)	12 volt	24 volt
Pump - Motor Unit	180A	100A
Lowering valve	1,4A	0,7A
Shift valve	3,8A	2,0A
Magnetic(electric safety valve)	1,5A	0,75A
Solenoid	1,8A	0,9A
Cable area:		
Control cable	1,5mm ²	1,5mm ²
Main cable <8m	35mm ²	35mm ²
Main cable 8-15m	35mm ²	35mm ²
Main cable >15m	-	35mm ²
Power source:		
Min. capacity	180Ah	170Ah
Min. voltage	9 Volt	18 Volt



Loading diagram

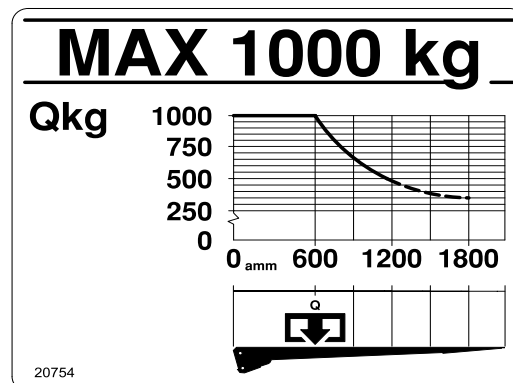

Installation dimensions (mm)

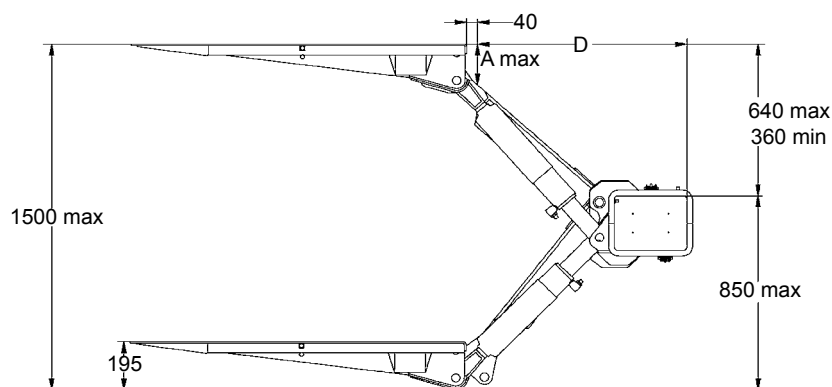

A	C	D
147	640	837
140	600	878
130	550	922
120	500	959
109	450	992
101	400	1020
94	360	1039

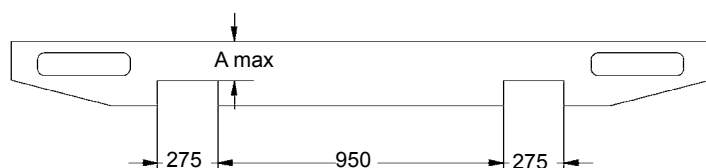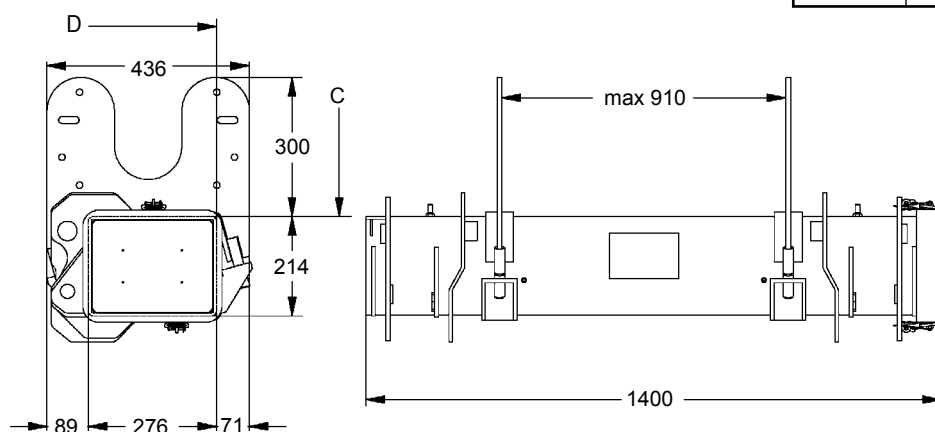

ZEPRO Sales
 Tel: +46 (0)150 489 550
 Fax: +46 (0)150 489 551, +46 (0)150 489 566
 E-mail: zeapro@zeapro.com, Internet: www.zeapro.com