



| 6400 (170 bar)                  | 12 volt            | 24 volt            |
|---------------------------------|--------------------|--------------------|
| Pump - Motor Unit               | 220A               | 120A               |
| Lowering valve                  | 1,4A               | 0,7A               |
| Shift valve                     | 3,8A               | 2,0A               |
| Magnetic(electric safety valve) | 1,5A               | 0,75A              |
| Solenoid                        | 1,8A               | 0,9A               |
| Cable area:                     |                    |                    |
| Control cable                   | 1,5mm <sup>2</sup> | 1,5mm <sup>2</sup> |
| Main cable < 8m                 | 35mm <sup>2</sup>  | 35mm <sup>2</sup>  |
| Main cable 8-15m                | 35mm <sup>2</sup>  | 35mm <sup>2</sup>  |
| Main cable >15m                 | -                  | 35mm <sup>2</sup>  |
| Power source:                   |                    |                    |
| Min. capacity                   | 180Ah              | 170Ah              |
| Min. voltage                    | 9 Volt             | 18 Volt            |


## Loading diagram

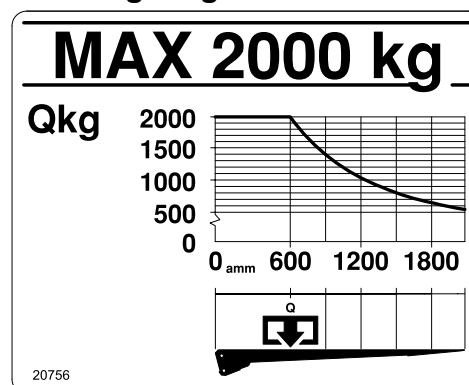

## Installation dimensions (mm)

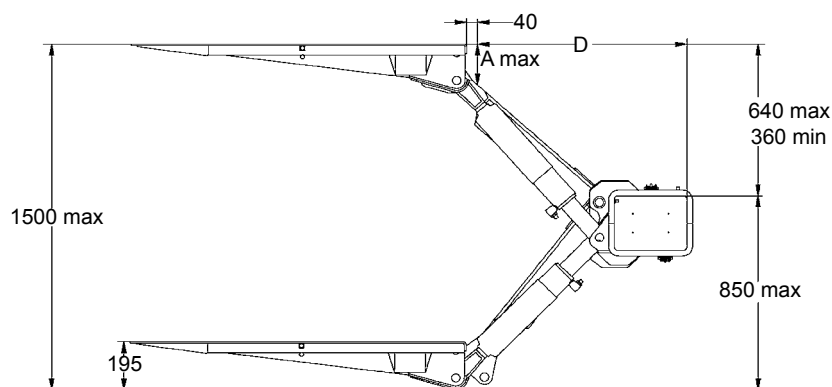

| A   | C   | D    |
|-----|-----|------|
| 147 | 640 | 837  |
| 140 | 600 | 878  |
| 130 | 550 | 922  |
| 120 | 500 | 959  |
| 109 | 450 | 992  |
| 101 | 400 | 1020 |
| 94  | 360 | 1039 |

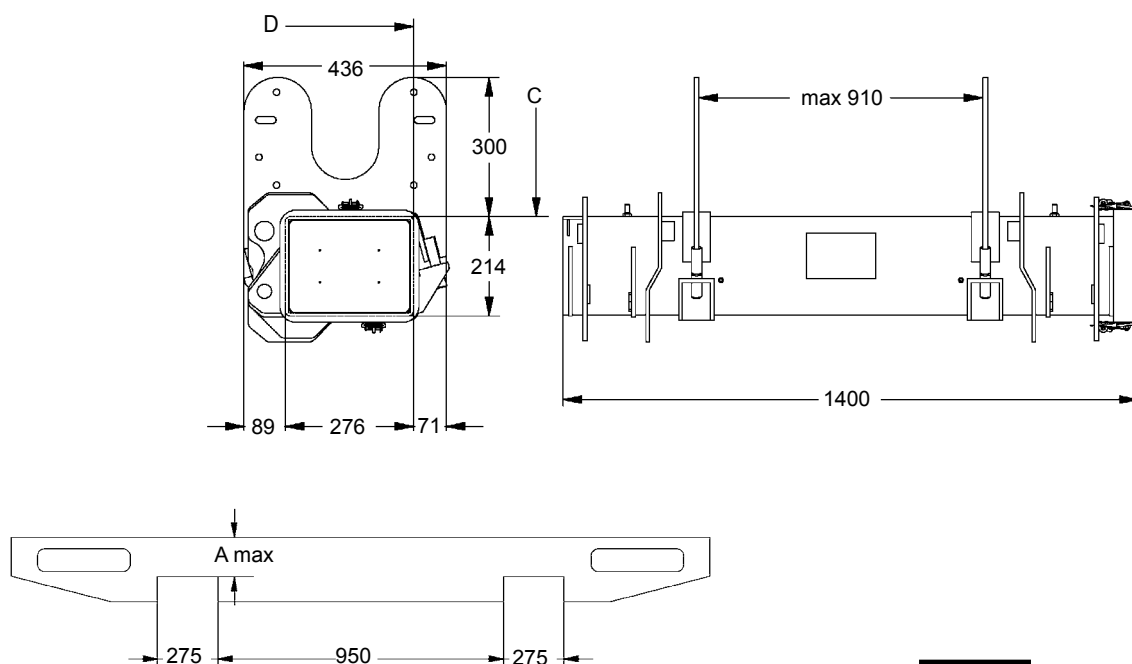

ZEPRO Sales  
 Tel: +46 (0)150 489 550  
 Fax: +46 (0)150 489 551, +46 (0)150 489 566  
 E-mail: [zeapro@zeapro.com](mailto:zeapro@zeapro.com), Internet: [www.zeapro.com](http://www.zeapro.com)