



Loading diagram



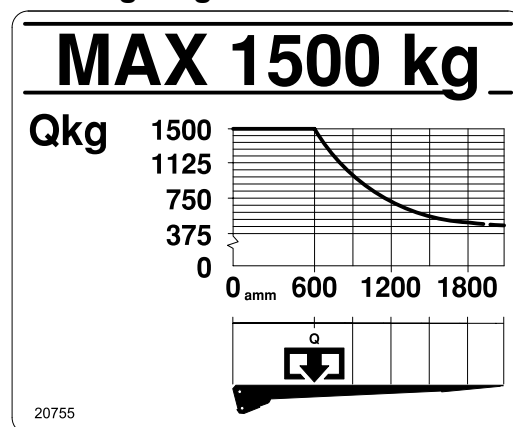


6400 (170 bar)	12 volt	24 volt
Pump - Motor Unit	220A	120A
Lowering valve	1,4A	0,7A
Shift valve	3,8A	2,0A
Magnetic(electric safety valve)	1,5A	0,75A
Solenoid	1,8A	0,9A
Cable area:		
Control cable	1,5mm ²	1,5mm ²
Main cable < 8m	35mm ²	35mm ²
Main cable 8-15m	35mm ²	35mm ²
Main cable >15m	-	35mm ²
Power source:		
Min. capacity	180Ah	170Ah
Min. voltage	9 Volt	18 Volt

Installation dimensions (mm)

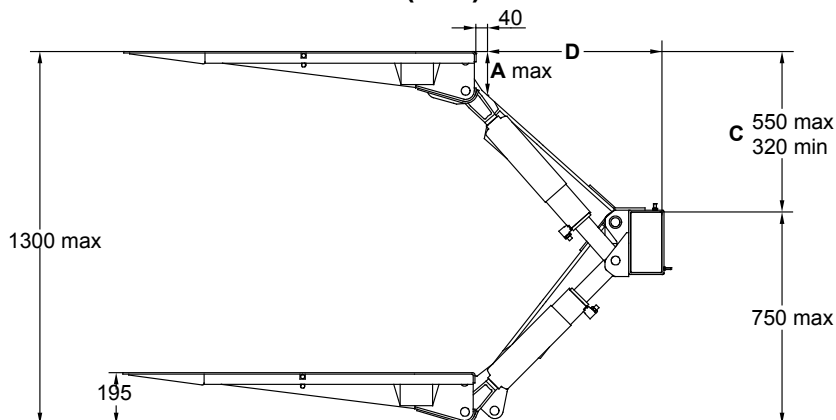

A	C	D
149	550	596
134	500	644
122	450	685
110	400	718
100	350	747
95	320	762

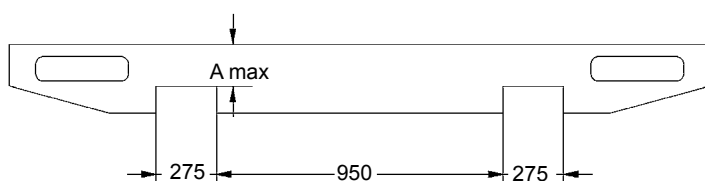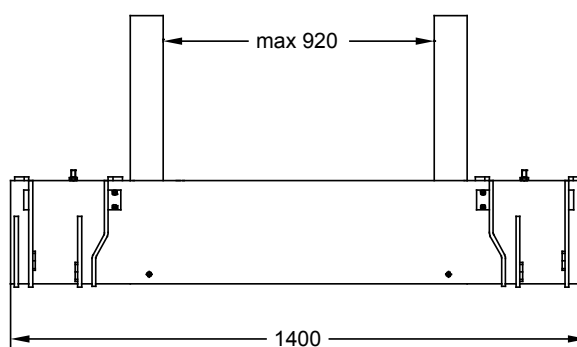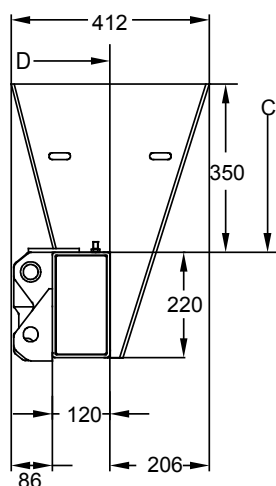

Z-Lyften Produktion AB
 Tel: +46 (0)150 489 550
 Fax: +46 (0)150 489 551, +46 (0)150 489 566
 E-mail: zepro@zepro.com, Internet: www.z-lyften.se