



Loading diagram

MAX 750 kg


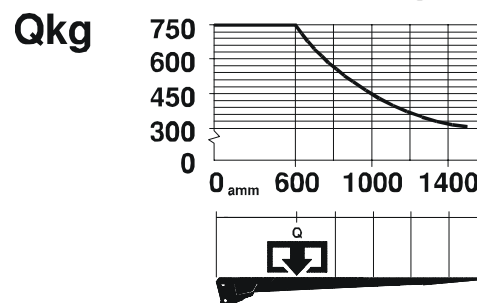


(170 bar)	12 volt	24 volt
Pump - Motor Unit	150A	80A
Magnet (hydraulic unit)	4,2A	2,1A
Magnet (electric safety valve)	1,5A	0,75A
Solenoid	1,5A	0,85A
Cable area:		
Control cable	1,5mm ²	1,5mm ²
Main cable 0-8m	35mm ²	35mm ²
Main cable 8-15m	50mm ²	35mm ²
Main cable <15m	-	50mm ²
Power source:		
Min. capacity	140Ah	110Ah
Min. voltage	9 Volt	18 Volt


Installation dimensions (mm)

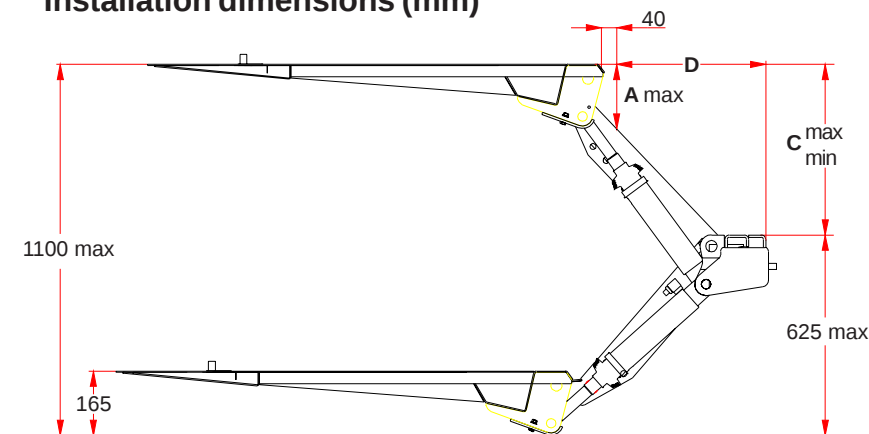

A	C	D
176	550	441
150	500	505
133	450	555
119	400	597
109	350	630
101	300	658
92	250	680

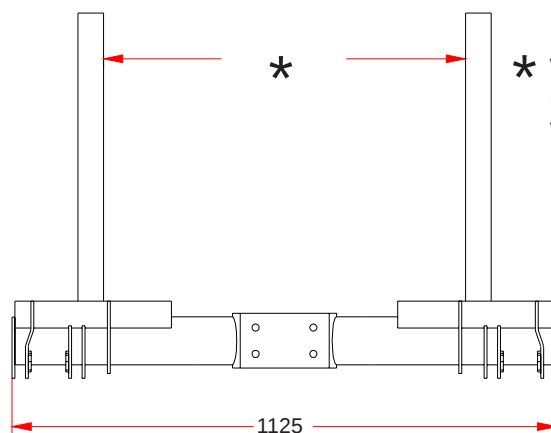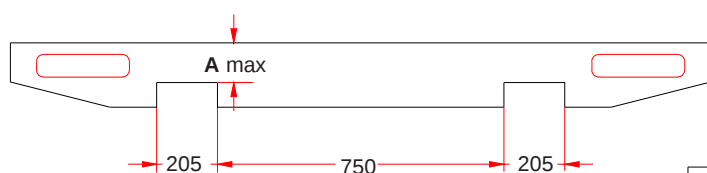

* With standard mounting brackets:
Vertical 560-1000
Horizontal 660-1020

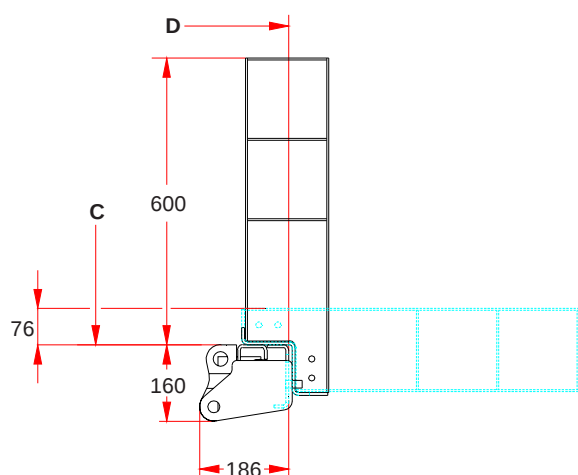

ZEPRO Sales

Tel: +46 150 489 550

Fax: +46 150 489 551, +46 150 489 566

E-mail: zepro@zepro.com

Internet: www.zepro.com