



| (130 bar)                      | 12 volt            | 24 volt            |
|--------------------------------|--------------------|--------------------|
| Pump - Motor Unit              | 125A               | 65A                |
| Magnet (hydraulic unit)        | 4,2A               | 2,1A               |
| Magnet (electric safety valve) | 1,5A               | 0,75A              |
| Solenoid                       | 1,5A               | 0,85A              |
| Cable area:                    |                    |                    |
| Control cable                  | 1,5mm <sup>2</sup> | 1,5mm <sup>2</sup> |
| Main cable 0-8m                | 35mm <sup>2</sup>  | 35mm <sup>2</sup>  |
| Main cable 8-15m               | 50mm <sup>2</sup>  | 35mm <sup>2</sup>  |
| Main cable <15m                | -                  | 50mm <sup>2</sup>  |
| Power source:                  |                    |                    |
| Min. capacity                  | 140Ah              | 110Ah              |
| Min. voltage                   | 9 Volt             | 18 Volt            |




Loading diagram

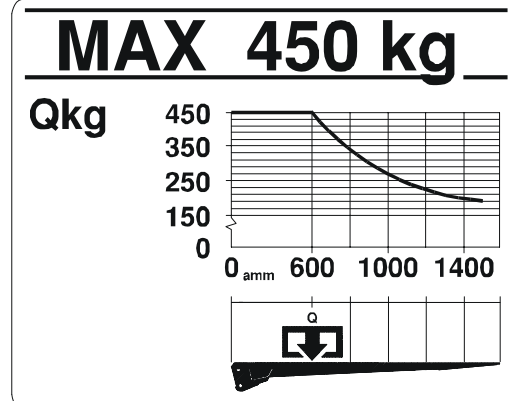

Installation dimensions (mm)

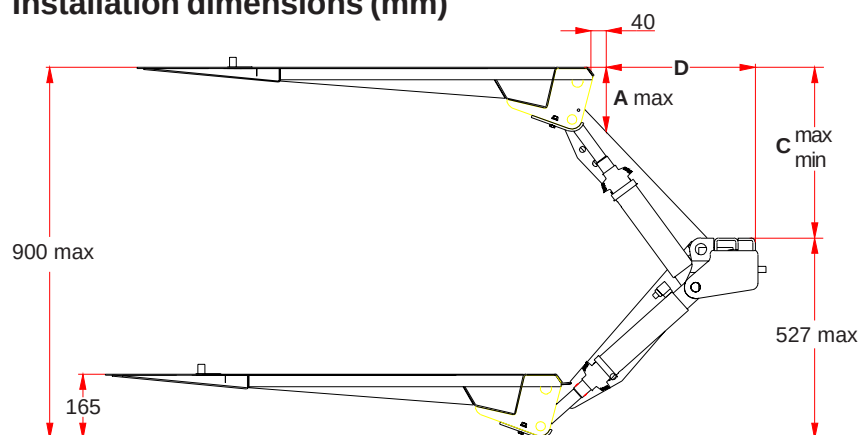

| A   | C   | D   |
|-----|-----|-----|
| 171 | 450 | 392 |
| 144 | 400 | 451 |
| 127 | 350 | 496 |
| 114 | 300 | 531 |
| 103 | 250 | 559 |

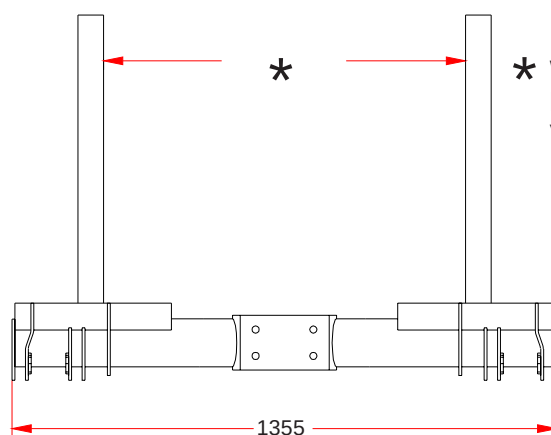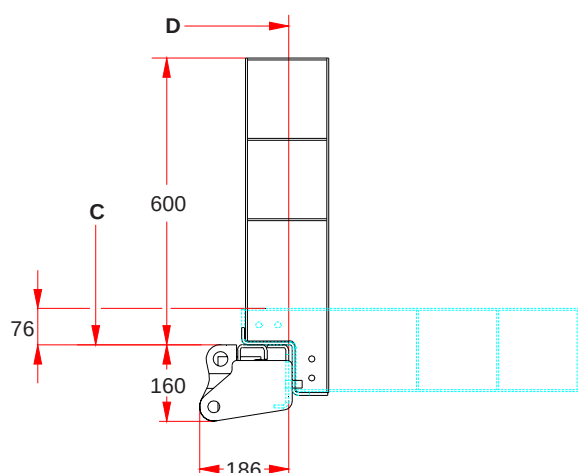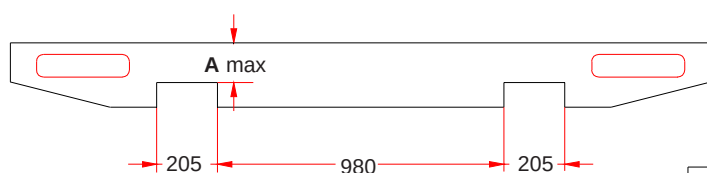

\* With standard mounting brackets:  
Vertical 760-1230  
Horizontal 770-1250



ZEPRO Sales

Tel: +46 150 489 550

Fax: +46 150 489 551, +46 150 489 566

E-mail: [zepro@zepro.com](mailto:zepro@zepro.com)

Internet: [www.zepro.com](http://www.zepro.com)