



(170 bar)	12 volt	24 volt
Pump - Motor enhet	150 A	80 A
Magnet (hyd. enhet)	4,2 A	2,1 A
Magnet (el. slangbr. ventil)	1,5 A	0,75 A
Solenoid	1,5 A	0,85 A
Ledningsarea:		
Manöverkabel	1,5 mm ²	1,5 mm ²
Matarledning 0-8 m	35 mm ²	35 mm ²
Matarledning 8-15 m	50 mm ²	35 mm ²
Matarledning <15 m	-	50 mm ²
Strömkälla:		
Min. kapacitet	140 Ah	110 Ah
Min. spänning	9 Volt	18 Volt




Belastningsdiagram

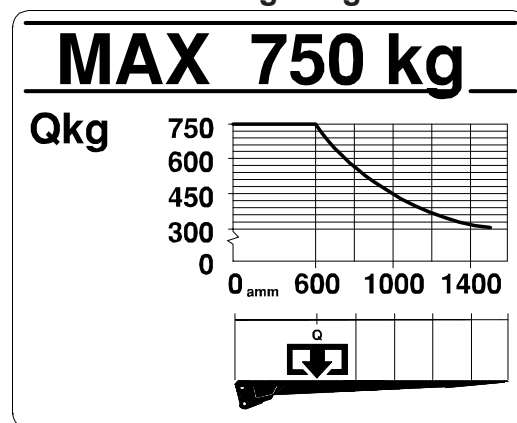

Inbyggnadsmått (mm)

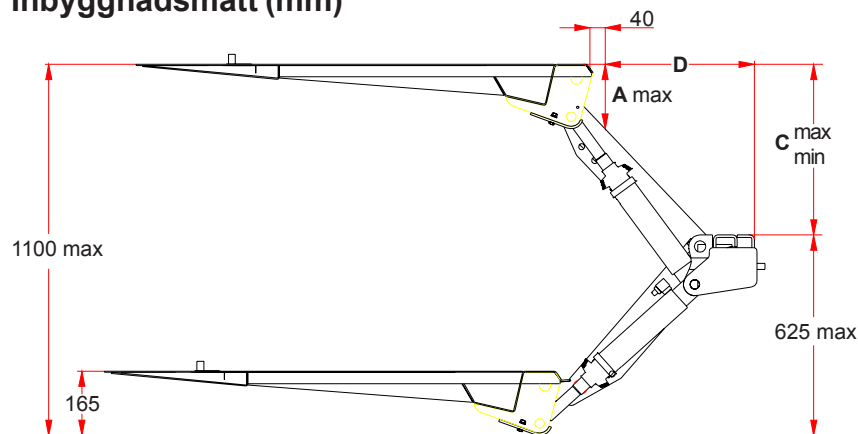

A	C	D
150	500	505
133	450	555
119	400	597
109	350	630
101	300	658
92	250	680

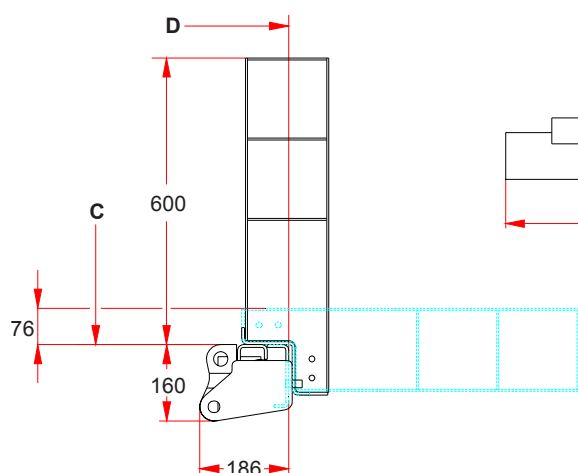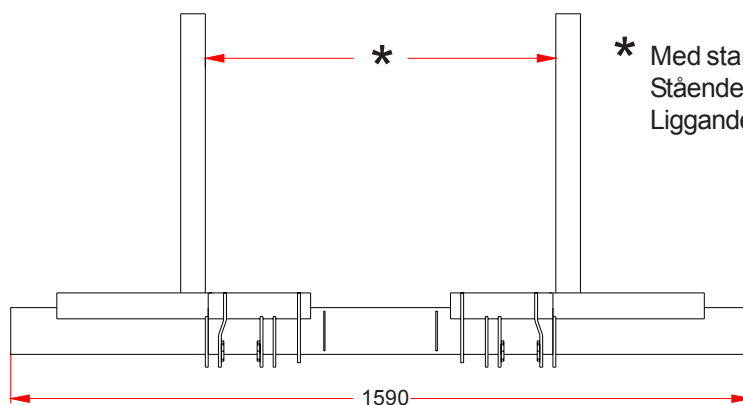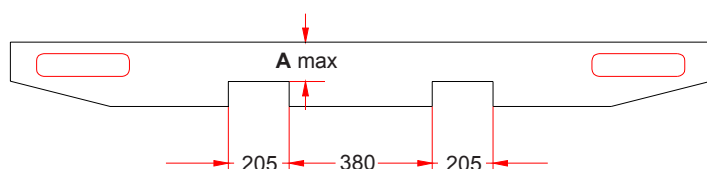

Z-Lyften Produktion AB
Tel: +46 (0)150 489 550
Fax: +46 (0)150 489 551, +46 (0)150 489 566
E-mail: zepro@zepro.com, Internet: www.z-lyften.se