



# ZEPRO ZAEHD 150-155

Belastningsdiagram

| (200 bar)                    |                     | 12 volt             | 24 volt             |
|------------------------------|---------------------|---------------------|---------------------|
| Pump - Motor enhet           |                     | 245 A               | 145 A               |
| Magnet (hyd. aggregat)       |                     | 4,2 A               | 2,1 A               |
| Magnet (el. slangbr. ventil) |                     | 1,5 A               | 0,75 A              |
| Solenoid                     |                     | 1,8 A               | 0,9 A               |
| Ledningsarea:                | Manöverkabel        | 1,5 mm <sup>2</sup> | 1,5 mm <sup>2</sup> |
|                              | Matarledning 0-8 m  | 35 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
|                              | Matarledning 8-15 m | 50 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
|                              | Matarledning >15 m  | –                   | 50 mm <sup>2</sup>  |
| Strömkälla:                  | Min. kapacitet      | 180 Ah              | 170 Ah              |
|                              | Min. spänning       | 9 volt              | 18 volt             |


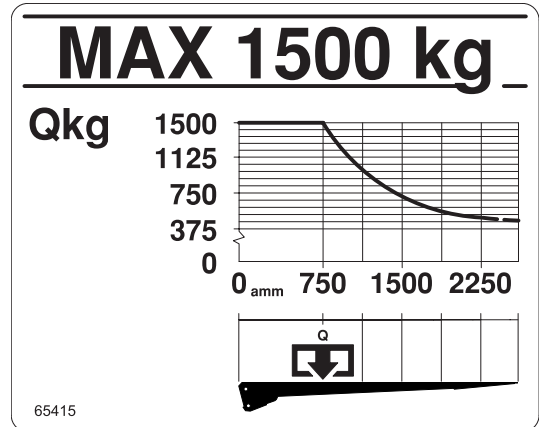


Innbyggnadsmått (mm)

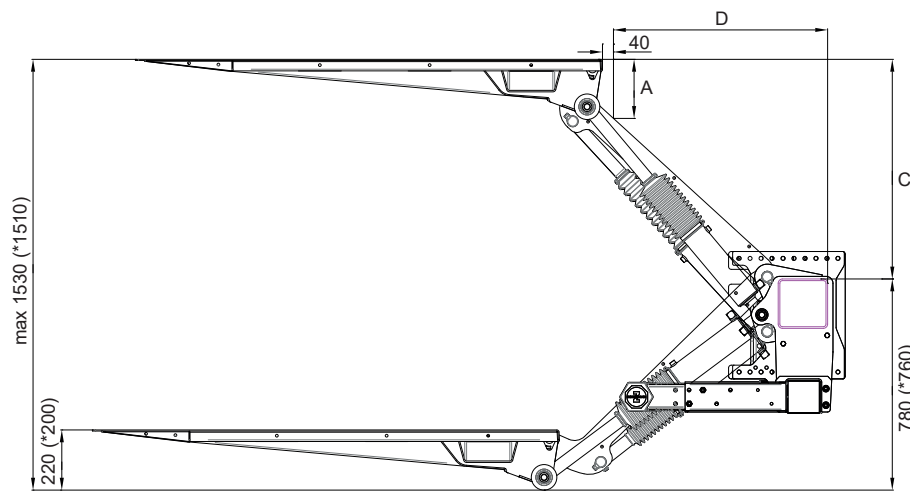

| C   | A   | D   |
|-----|-----|-----|
| 750 | 229 | 651 |
| 700 | 206 | 714 |
| 650 | 189 | 767 |
| 600 | 176 | 812 |
| 550 | 165 | 851 |
| 500 | 155 | 885 |
| 450 | 147 | 913 |
| 395 | 140 | 940 |

| Rambredd | L   |
|----------|-----|
| L-20     | 790 |
|          | 870 |

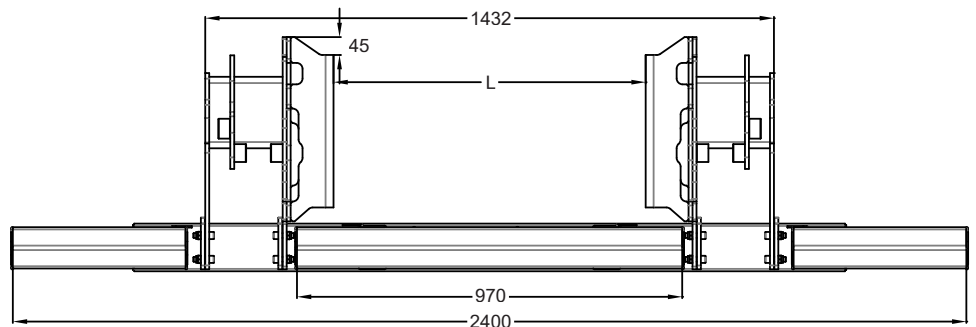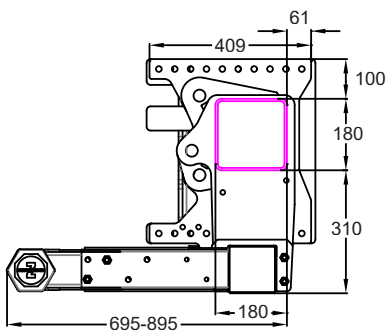


2020-09-17

## Z-Lyften Produktion AB

Tel.: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: [zepro@zepro.com](mailto:zepro@zepro.com) | [zepro.se](http://zepro.se)

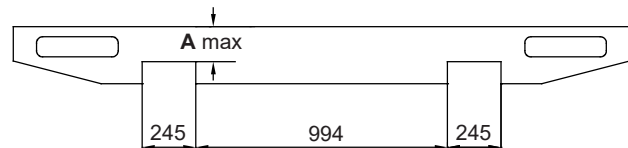

TEKNISKA DATA

