

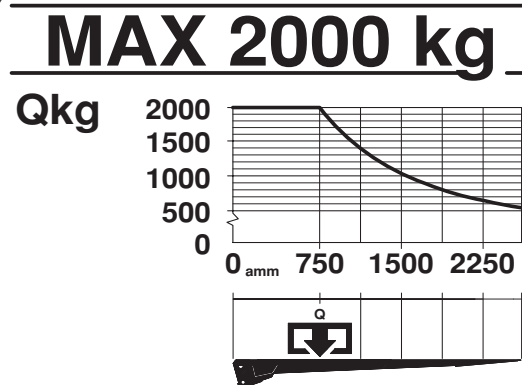
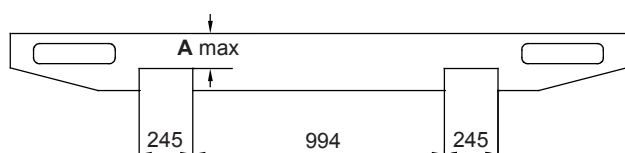
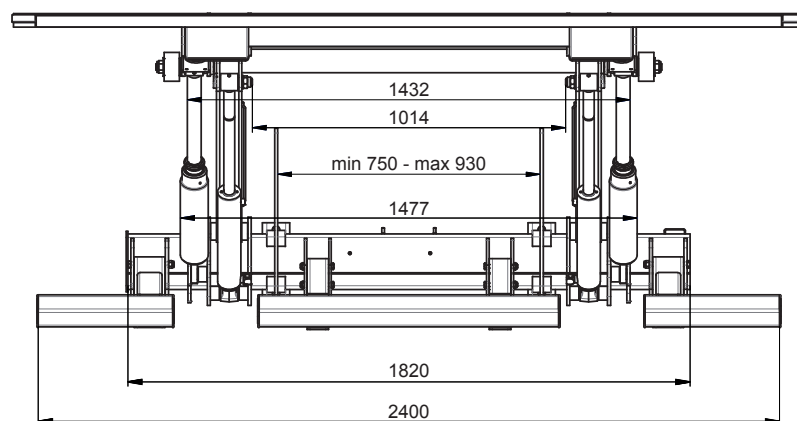


| (200 bar)                      | 12 volt             | 24 volt             |
|--------------------------------|---------------------|---------------------|
| Pump - Motor Unit              | 245 A               | 145 A               |
| Magnet (hydraulic unit)        | 4,2 A               | 2,1 A               |
| Magnet (electric safety valve) | 1,5 A               | 0,75 A              |
| Solenoid                       | 1,8 A               | 0,9 A               |
| Cable area:                    |                     |                     |
| Control cable                  | 1,5 mm <sup>2</sup> | 1,5 mm <sup>2</sup> |
| Main cable 0-8 m               | 35 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
| Main cable 8-15 m              | 50 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
| Main cable >15 m               | -                   | 50 mm <sup>2</sup>  |
| Power source:                  |                     |                     |
| Min. capacity                  | 180 Ah              | 170 Ah              |
| Min. voltage                   | 9 Volt              | 18 Volt             |

Loading diagram

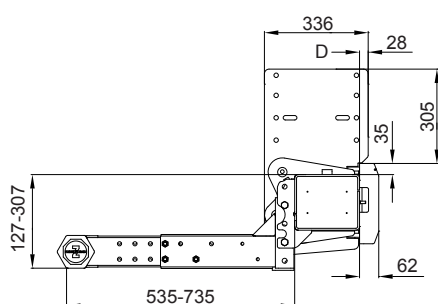

Dimensions for installation (mm)

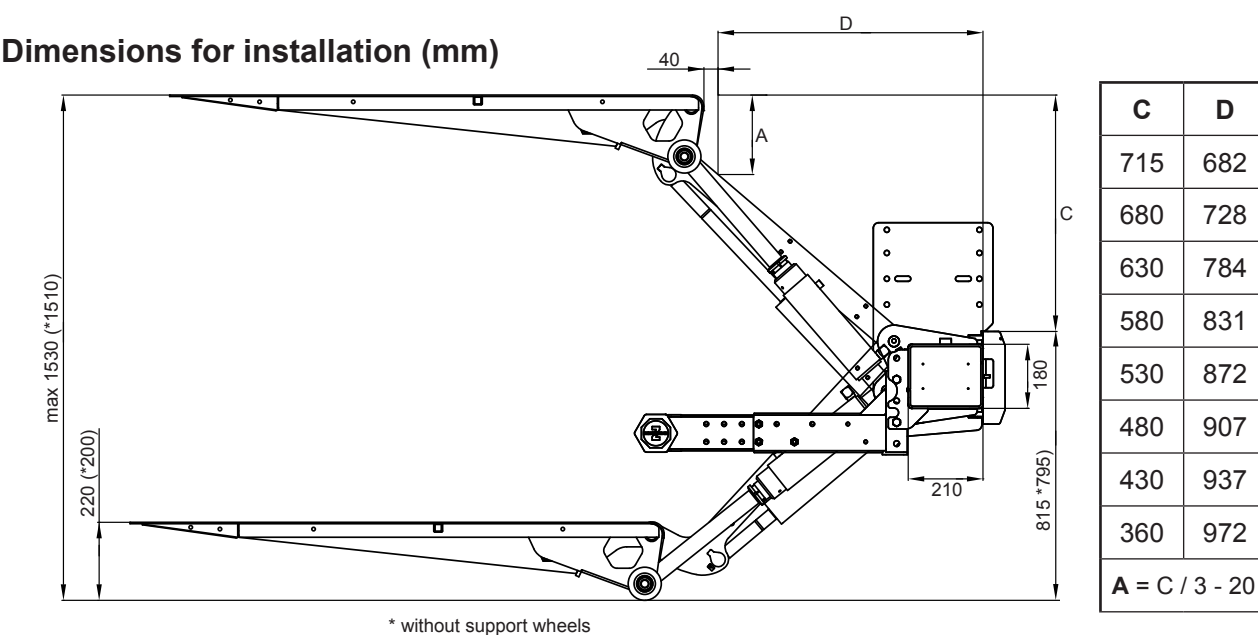

**ZEPRO**

ZEPRO Sales  
Tel: +46 (0)150 489 550  
Fax: +46 (0)150 489 551, +46 (0)150 489 566  
E-mail: [zezero@zezero.com](mailto:zezero@zezero.com). Internet: [www.zezero.com](http://www.zezero.com)