



# ZEPRO Z 75-90

Belastningsdiagram




| (150 bar)                    |                     | 12 volt             | 24 volt             |
|------------------------------|---------------------|---------------------|---------------------|
| Pump - Motor enhet           |                     | 115 A               | 75 A                |
| Magnet (hyd. aggregat)       |                     | 1,4 A               | 0,7 A               |
| Magnet (el. slangbr. ventil) |                     | 1,5 A               | 0,75 A              |
| Solenoid                     |                     | 1,8 A               | 0,9 A               |
| Ledningsarea:                | Manöverkabel        | 1,5 mm <sup>2</sup> | 1,5 mm <sup>2</sup> |
|                              | Matarledning 0-8 m  | 35 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
|                              | Matarledning 8-15 m | 35 mm <sup>2</sup>  | 35 mm <sup>2</sup>  |
|                              | Matarledning >15 m  | –                   | 35 mm <sup>2</sup>  |
| Strömkälla:                  | Min. kapacitet      | 140 Ah              | 110 Ah              |
|                              | Min. spänning       | 9 volt              | 18 volt             |

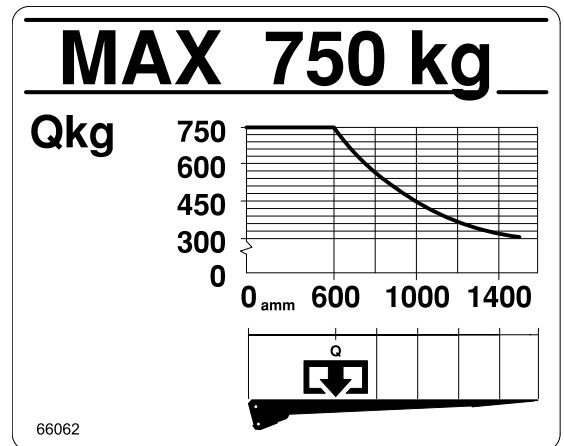

Inbyggnadsmått (mm)

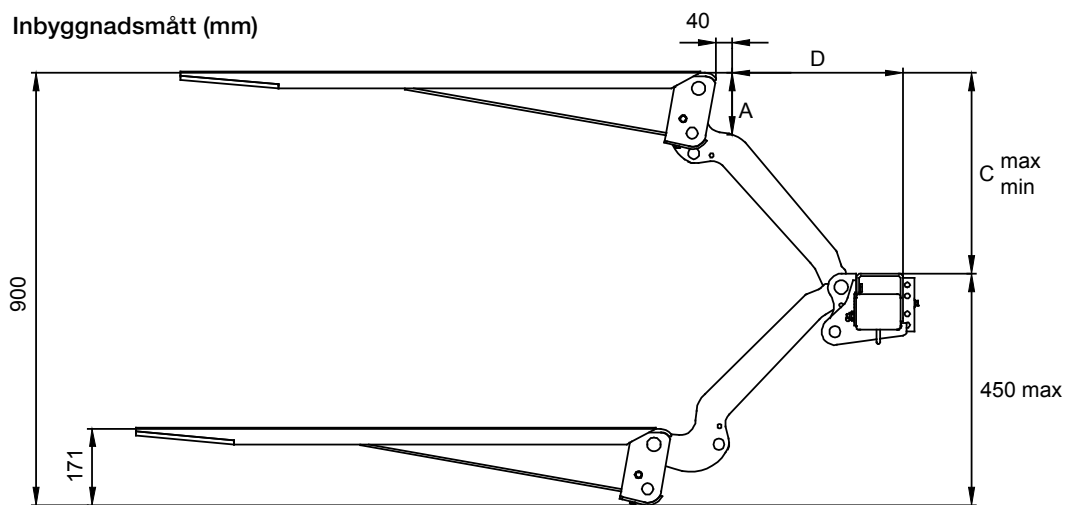

| C   | A   | D   |
|-----|-----|-----|
| 450 | 136 | 384 |
| 400 | 126 | 444 |
| 350 | 115 | 490 |
| 300 | 104 | 526 |
| 250 | 96  | 554 |

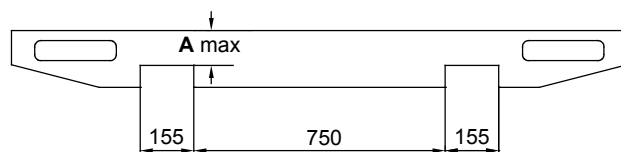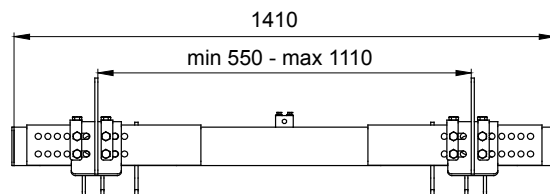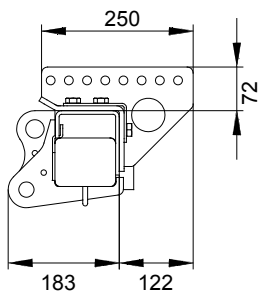

2017-04-19

## Z-Lyften Produktion AB

Tel.: +46 (0)150 489 550

Fax: +46 (0)150 489 551, +46 (0)150 489 566

E-mail: [zepro@zepro.com](mailto:zepro@zepro.com) | [zepro.se](http://zepro.se)